
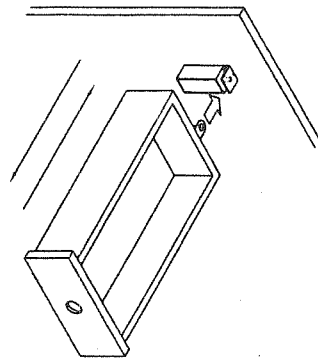
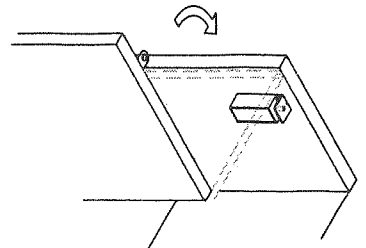
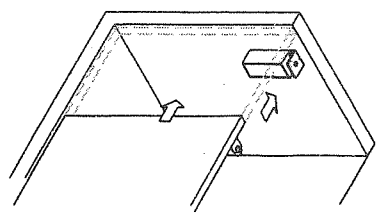
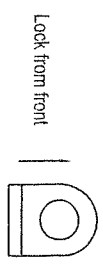




# CABINET LOCK

## Technical details :

Input : Selectable 12/24VDC  
 Current : 12VDC/300mA, 24VDC/150mA  
 Status : Selectable fail-safe/non fail-safe  
 Signal (Optional):  
 (1) Lock status: Micro-switch  
 Rating : 1A / 30VDC  
 (2) Door status: Reed switch  
 Max 10W (Max Switching Contact 1.5A)





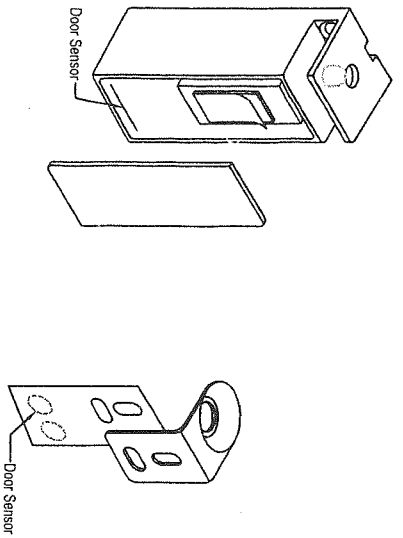


Lock from front in sliding door

Lock from side in a pull door

Lock from front in sliding door

## Switch from fail-safe to non fail-safe ( or vice-versa ) :

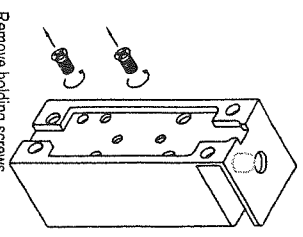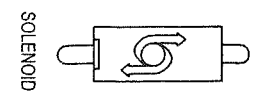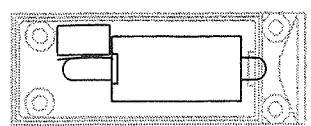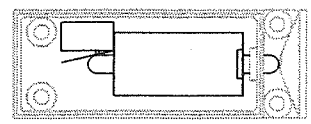




Proper position in non fail-safe mode    Proper position in fail-safe mode

Remove holding screws


Reverse solenoid direction

## Mounting process:

1. Mount the cabinet lock and tighten the screws.
2. Switch cabinet lock to desired mode (fail-safe or non-fail safe).
3. Pull out double side tape attached to the PC board and stick the PC board to the case.
4. Pull out protective adhesive strip and stick stainless steel plate cover.

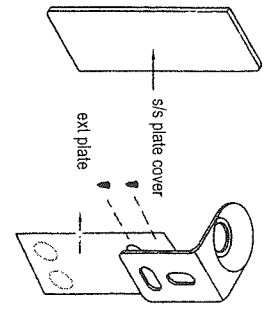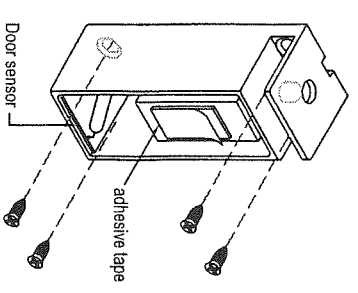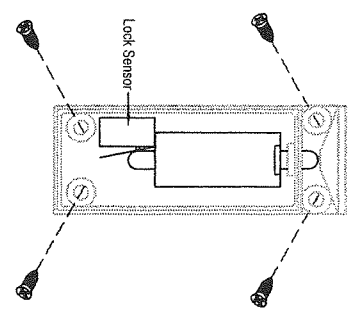

## Wire connection ( connect provided varistor according to diagram )

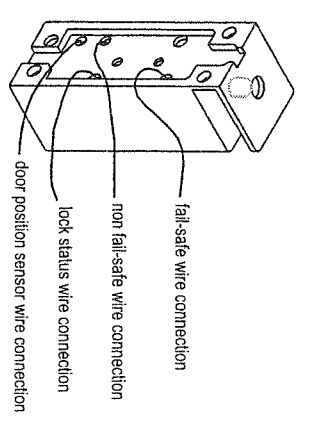

12VDC	24VDC

DOOR POSITION SENSOR	LOCK STATUS SENSOR